

DENALI SIM SWAP

HOW TO SWAP SIM CARD

WIFIRANGER™

A WINEGARD COMPANY

LTE connectivity requires a data plan supported by an authorized Cellular Carrier (sold separately)

▼ INSTALL TOOLS ▼



Drill + PH2 extended bit
(or PH2 screwdriver)

Converge™
by WIFIRANGER™
DENALI



▼ LTE SIM SWAP ▼


1) Unscrew Denali hood



2) Remove Denali hood



3) Remove tray

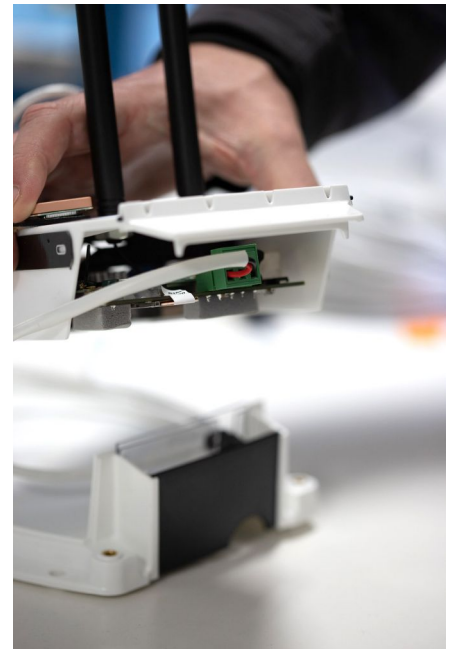

SUPPORTED LIST


USB LTE TETHERING DEVICES

WiFiRANGER™

A WINEGARD COMPANY

▼ LTE SIM SWAP ▼


4) Locate SIM slot on underside of tray assembly

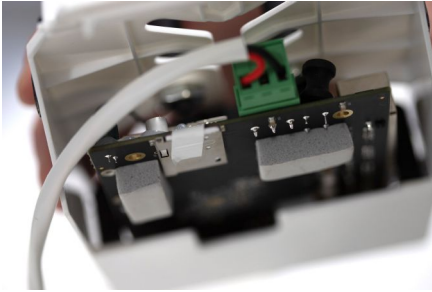


5) Peel back retainer sticker from SIM slot




6) Press old SIM card to eject from SIM slot then remove

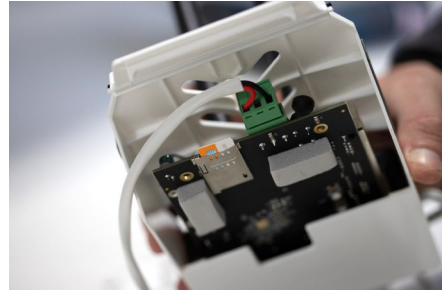


7) Orient new SIM card with golden side facing up as shown

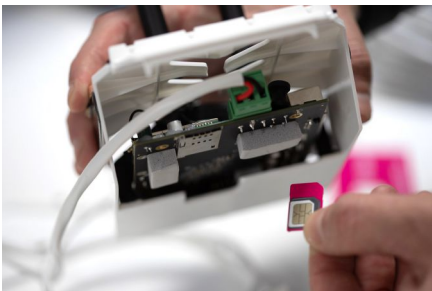


8) Insert new SIM card into SIM slot

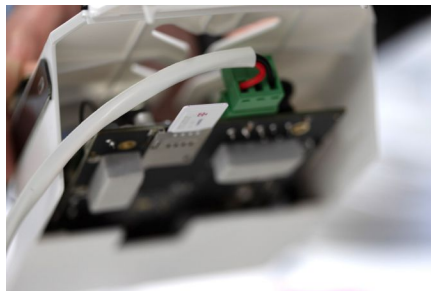

9) Reseal retainer sticker to secure new SIM card

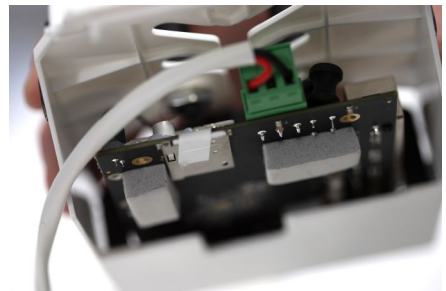

10) Reinsert tray onto base of Denali

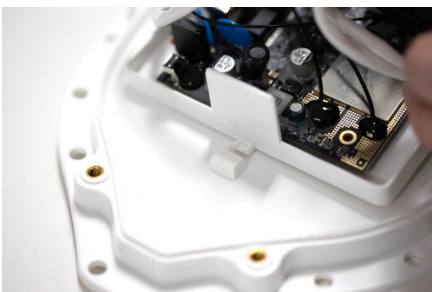

11) Place hood back on Teton base and ensure back groove is fitted



12) Tighten screws for hood at hand-snug level (do not use high torque)

